


Vacuum Receiving Chamber

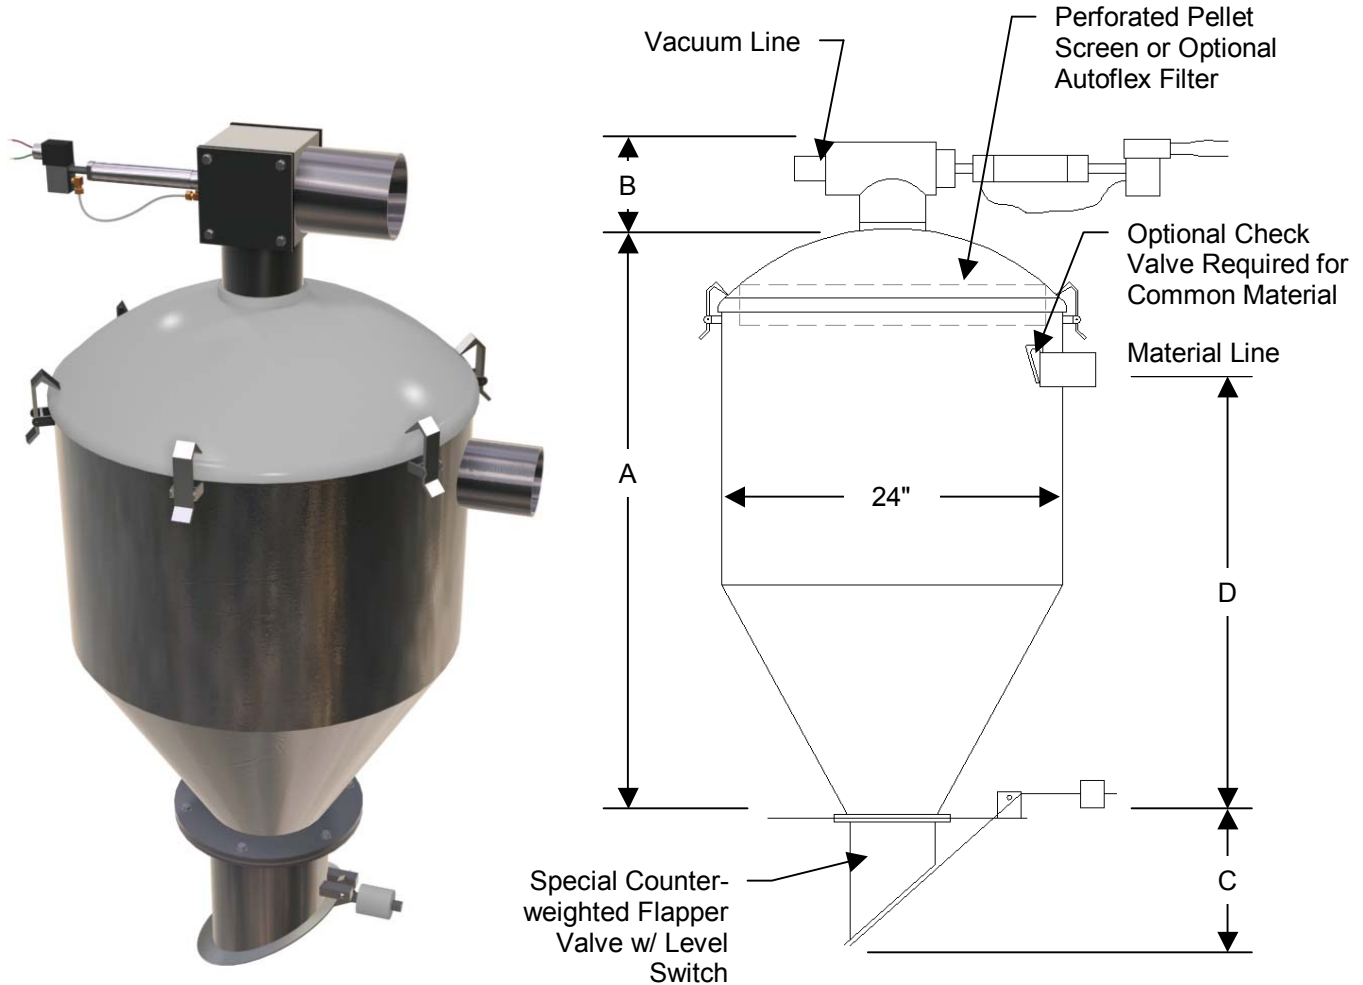

NOTES:

- VACUUM RECEIVING CHAMBER COMPLETE WITH 2", 2 1/2", 3" OR 4" INLET STUB, COUNTER-WEIGHTED ALUMINUM DISCHARGE VALVE, AND LEVEL SWITCH.
- LID ASSEMBLY COMPLETE WITH PERFORATED SCREEN OR OPTIONAL AUTOFLEX FILTER TO PREVENT CARRYOVER
- VACUUM CONTROL VALVE
- OPTIONAL WEATHER SHIELD IS AVAILABLE FOR OUTDOOR INSTALLATION

MODEL	VOLUME CU. FT.	DIMENSIONS				MOUNTING FLANGE				
		A	B	C	D	OD	ID	BC	HOLES	SIZE
C-6	.6	21"	5 1/2"	7"	12 7/8"		11 1/2"	13"	6	3/8"
C-20	2	27 7/8"	6 3/4"	7"	19 3/4"		11 1/2"	13"	6	3/8"
C-40	4	36"	6 3/4"	7"	26 1/16"	24"		22"	28	9/16"
C-60	6	53 1/2"	6 3/4"	7"	43 9/16"	24"		22"	28	9/16"

All specifications are approximate and subject to change without notice.



Amtec Engineering, Inc.
 11760 Clay Road
 Houston, TX 77043
www.amtecengineering.com